


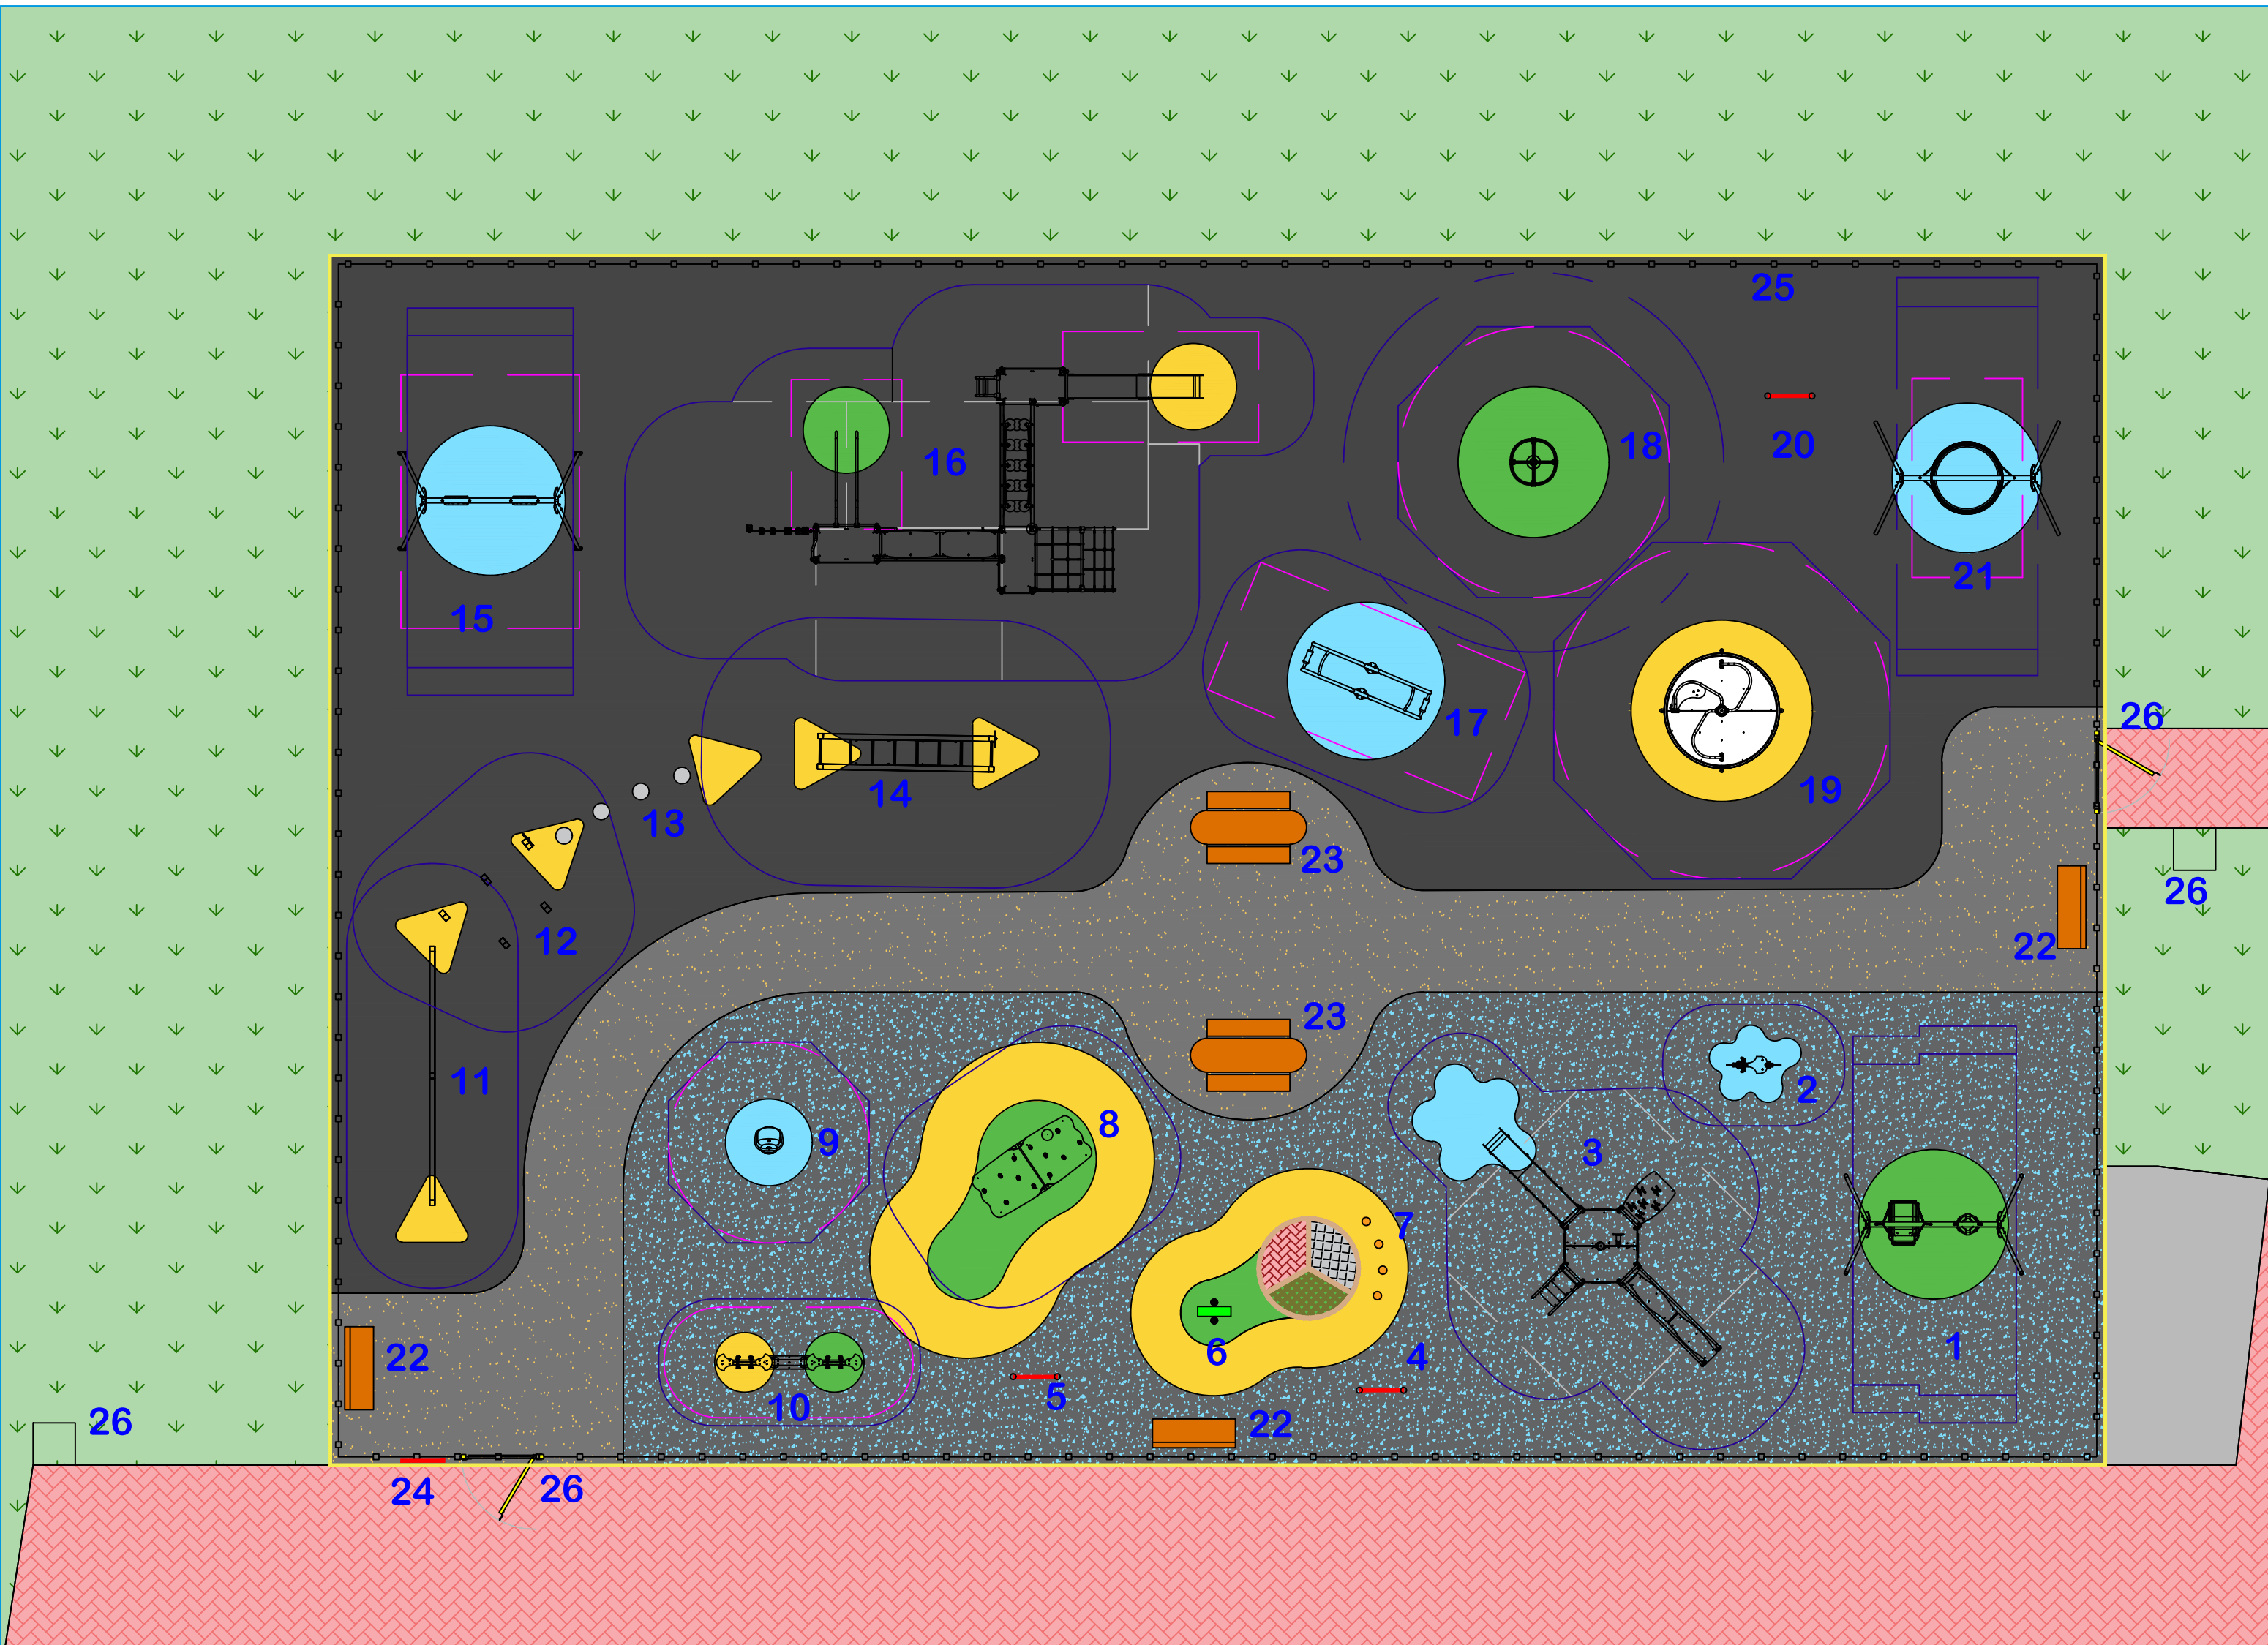

ITEMS LIST

- Play Equipment**
1. Metal Combination Swing: 1x Cradle Seat 1x Inclusive Seat (2.09m high frame) Ref: UKJ439SP-UK2024-23 Ref: J2821A
 2. Frankie the Fish Springer Ref: J2646A-M
 3. Tema Aquatica Multiplay Unit Ref: UKFIBUTTERFLY6
 4. Fahr Sparkling Butterfly Panel* Ref: UKFIPIRATE6
 5. Fahr Pirate Head Through Panel* Ref: UKFIECORW-WP
 6. Fahr Eco Rain Wheel with posts Ref: UKFIECORW-WP
 7. AE Evans Stepping Logs with steel feet Ref: UKAESTEPPIINGLOGS-SF
 8. Climbing Hut Ref: J254A
 9. Spinning Bowl Ref: J2411A
 10. Tree Frogs Seesaw Ref: J985A
 11. Balancing Beam Ref: JPS14A
 12. Junior Slalom Ref: JPS10A-J
 13. 4no ILP Rubber 400mm Stepping Post Ref: UKILPSPBLK400
 14. Senior Monkey Bars Ref: JPS21A-S
 15. Metal Flat Seat Swing Ref: J472A
 16. Diabolo Multiplay Unit Ref: J38108A-C
 17. Double Perch** Ref: J986A
 18. Roll-up Ref: J2591A
 19. Wheelchair Accessible Roundabout Ref: J2409A
 20. Fahr Tic Tac Toe Play Panel* Ref: UKFITITAC3
 21. Metal Pod Swing Ref: J441A
 - *Including 2 posts Ref: UKFIRPSQ1550
 - ** Including ground buffer Ref: GM3702

- Ancillaries**
- 22.3no Marmax Recycled Plastic Reston Seat inc. extended legs (black) Ref: UKMMXSEAT
 - 23.2no Marmax Heavy Duty Recycled Plastic Picnic Bench inc. extended top and legs (black) Ref: UKMMXPBENCH-ET
 24. A2 Play Area Sign fence mountedRef: UKA2GS
 - 25.107 Linear Metres Bowtop Fence 1.2m High Powdercoated Green Ref: UKN1006
 - 26.2no 1.2m High Hydraulic Self Closing Gate (RIGHT HINGE) - Yellow Ref: UKN1102
 27. Bin by others

Safety Surfacing
Area to be surfaced 594m² wetpour laid on to new stone base (groundworks and new stone base to be completed by CLIENT).
Fall height breakdown:
427m² @ 1.2m and below
42m² @ 1.4m
19m² @ 1.5m
16m² @ 1.6m
22m² @ 1.7m
7m² @ 2.1m
28m² @ 2.4m
33m² @ 2.6m

Colour breakdown:
338m² Black
169m² Light Blue/Black 50:50 mix
25m² Light Blue
39m² Yellow
23m² Light Green

- 103m² Permeable paving with yellow/gold fleck

- Groundworks**
- 9 Linear Metres block edging (sensory path)
 - Sensory pathway including granite sets, block pavers, artificial grass (1m² each).
 - Hard dig for installing into stone base
 - Reinstatement of existing turf where damaged by installation, only in areas that will not be removed in subsequent development plan

- Removals**
- All necessary removals are to be done by others.

- Miscellaneous**
- Preliminaries
 - Delivery & Off-loading of partnership & landscaping elements (not included in the Proludic delivery)

- Added Value**
- Post Installation Inspection by Play Inspection Company - FREE OF CHARGE Value £450
 - Proludic Protect Package - GOLD WITH INCLUSIVE ROUNDABOUT - 1x Annual Maintenance Service, 1x Independent RPII Annual Inspection & 3x Independent RPII Operational Inspections - FREE OF CHARGE Value £1745

- Groundworks & Drainage to be completed by CLIENT**
Information below provided by client
- Excavate base to formation levels 200mm below finished surface levels and arrange disposal of all spoil [774m²] excluding edging haunchings].
 - Set 50 x 1500mm PCC edgings [manufactures in accordance with BS EN 1340] around perimeter of play area apart from southern edge which has been allowed for in Section 3 [total length 79.5m]. Edgings to be bedded on minimum 100mm deep x 300mm wide ST4 concrete foundation and haunches to within 50mm of top edges.
 - Lay 150mm AcoDrain with galvanised steel gratings on 100mm steep ST4 concrete foundation and haunching to within 50mm of top edge [total length 35m]. Form connection to chamber 1 constructed in Section 2 above.
 - Lay total thickness of 160mm MT Type 1 clean primary aggregate on non-woven geotextile in properly consolidated layers [765m²] to form base for safety surfacing
 - Carry out excavation from natural ground level down to the level of the perimeter path of the MUGA with 1:3 batter either side of this section of path dressed with 100mm multipurpose topsoil certified to BS3882 spread with multipurpose grass seed.
 - Carry out reduced level excavation to a minimum depth of 220mm to establish formation levels for 2no paths and arrange offsite disposal of all spoil.
 - Supply and lay up to 50mm of 50mm black electrical duct from electric cabinet base to position adjacent to MUGA to be confirmed. Duct to have 450mm cover with warning tape 200mm above top of duct.
 - Set 50 x 1500mm PCC edgings [manufactured in accordance with BS EN1340] to form edges of all paths not bounded by kerbs or edgings allowed for elsewhere [total length 161m]. Edgings to be bedded on minimum 100mm deep x 300mm wide ST4 concrete foundation and haunched to within 50mm of top of back edge.
 - Lay 150mm thick layer of fully compacted Type 1 clean primary aggregate conforming to SHW Clause 803 & BS EN 13285 on non-woven geotextile membrane [total area 136m²].
 - Fully bed 450 x 450mm buff coloured blister pattern tactile dabs on sand/cement [6m²].
 - Install 900mm with Uni-Gate at western and eastern pedestrian entrances onto Copthorne Bank on 150 x 150mm pointed treated timber posts withgalvanised hinges and latch set.
 - Lay and roll 50mm AC 20 dense bin 100/150 binder course and 20mm AC 6 dense surf 100/150 wearing course conforming with BS EN13108 [total area 130m²].

Subject to full site survey from a Proludic Representative.

Wetpour guarantees are only valid when laid onto appropriate subbase with pre-cast concrete edging (PCC) to the manufacturer's specification. Wetpour guarantees will not be applicable when wetpour is laid onto any existing surface this includes (but not limited to) existing wetpour, paving slabs, tarmac & concrete.

Preliminaries have been included within your quotation, these equate to site setup, safety fencing, safety signage, welfare, offloading of equipment, storage & waste removal.

Measurements taken from client drawing Ref: WPC-CP-04

Measurements correct at time of CAD drawing.

All pathways, furniture, planting, mounding and any other soft landscaping works not mentioned above are to be done by others.

Removals, groundworks and drainage are to be completed by the CLIENT.

PRODUCT KEY

	Grass by others		Pathway by OTHERS		Black/Colour 50:50 mix wetpour
	Tarmac by others		Black Wetpour		Permeable Paving
	Bowtop Fence		Colour Wetpour		PCC Edge by CLIENT
	Free Fall		Free Space		Block Paver Edge

Copthorne Recreation Ground Play Area

Worth Parish Council

DATE: 17/03/2026 REF: 2603.51677(Copthorne_WorthPC)

REV: DB: DB/AL/DB CB: AL/DB/PP

SCALE: 1:100 @ A2

